

The 5080 eliminates the time consuming "heat, beat, cut, repeat" methods of removing bushing assemblies.

HYDRAULIC ACCESSORIES:

OTC Cobra Single-Speed Hydraulic Hand Pump

This single-speed pump develops up to 10,000 PSI operating pressure and can operate horizontally or vertically in the head "down" position. Fingertip control provides instant release or pumping action. Has a built-in safety overload valve as well as a 12.5 cu. in. reservoir.

No. 4000 – Cobra hand pump only. Wt., 6 lbs., 13 oz.

No. 222559 – Quick Coupler

Precision designed and built for high pressures. Permits disconnecting hose without loss of oil.

No. 222618 – Hydraulic Hose
72" lg., 1/4" NPT male fittings.

Contact OTC's Customer Service Center
1-800-533-6127
for an OTC Distributor near you!

* For more information on the Horton Roller Bushing System, contact Horton Customer Service: 1-800-621-1320 www.hortoninc.com



SPX Corporation
655 Eisenhower Drive
Owatonna, MN 55060-0995 USA
Phone 507-455-7000
Customer Service 1-800-533-6127
Tech. Services 1-800-533-6127
Internet: www.otctools.com


Truck leaf spring bushing service made easy!

Replacement of front spring bushing assemblies is quick and easy with the new 5080 from OTC! It delivers up to 10 tons of hydraulic force to both remove and install truck front spring eye bushing assemblies. In many cases, the leaf spring hangers and spring assemblies can stay on the truck!

The 5080 works on bushings from 1-1/4" through 1-7/8" diameter, and pin diameters from 7/8" through 1-1/8". It handles all popular OE and aftermarket components, including Horton Roller Bushing™ pin and bushing assemblies.*

All accessories are included except the hydraulic pump and hose, which must be ordered separately.

No. 5080 – Truck Front Leaf Spring Pin and Bushing Service Set with storage organizer case.
Wt., 17 lbs., 10 oz.

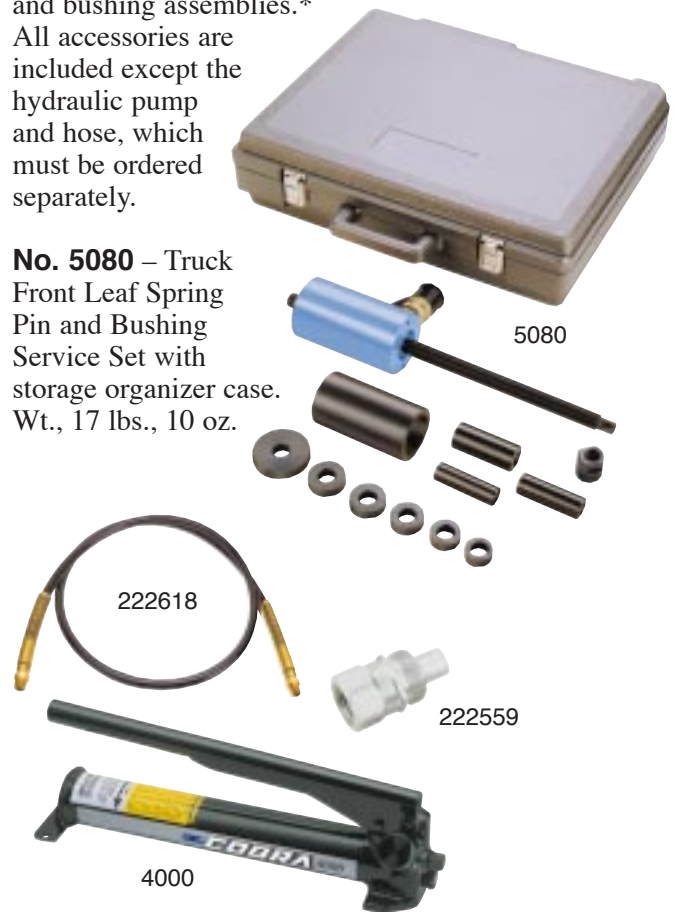

Specifications:

Maximum operating pressure.....	10,000 PSI
Volume per stroke.....	.069 cu. in.
Reservoir capacity.....	12.5 cu. in.
Oil port.....	1/4" NPT

DISTRIBUTED BY: