


SPX**OTC**

20-ton Truck Ramps

Application:**Tractors (semis)**

- Long, 33" retractable T-handle enhances mobility.
- Non-skid rubber matting prevents slippage during use.
- Durable, heavy-duty rubber wheels.
- Capacity per pair: 20 tons; overall length: 51"; tread width: 10"
- Covered by OTC Lifetime Marathon Warranty®.

No. 5268 – 20-ton truck ramps.
(Pair) Wt., 230 lbs.

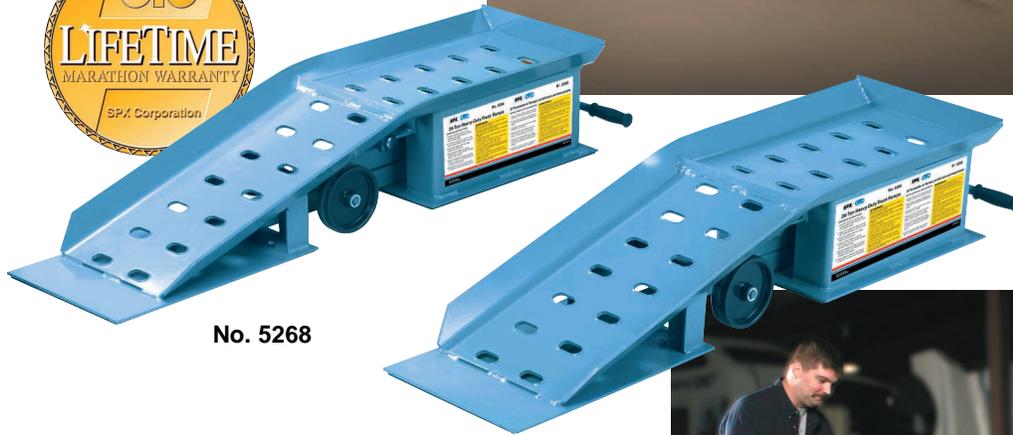

No. 5268

Specifications:

Frame Height	9-1/4" (23.5 cm)
Frame Width	13-1/2" (34.29 cm)
Frame Length	47" (119.38 cm)
Wheel Diameter	5" (12.7 cm)
Handle Length	33" (83.82 cm)



T-handle and five-inch wheels make maneuvering into position easy.

SPX**OTC**

20-ton Wide Truck Ramps

**Application: Wider Front Wheels
(cement, dump, garbage trucks)**

- Long, 33" retractable T-handle enhances mobility.
- Non-skid rubber matting prevents slippage during use.
- Durable, heavy-duty rubber wheels.
- Capacity per pair: 20 tons; overall length: 51"; tread width: 16"
- Covered by OTC Lifetime Marathon Warranty®.

No. 5269 – 20-ton wide truck ramps. (Pair)
Wt., 312 lbs.




No. 5269

Specifications:

Frame Height	9-1/4" (23.5 cm)
Frame Width	18-1/4" (46.36 cm)
Frame Length	47" (119.38 cm)
Wheel Diameter	5" (12.7 cm)
Handle Length	33" (83.82 cm)

Long, 33" retractable
T-handle enhances mobility.

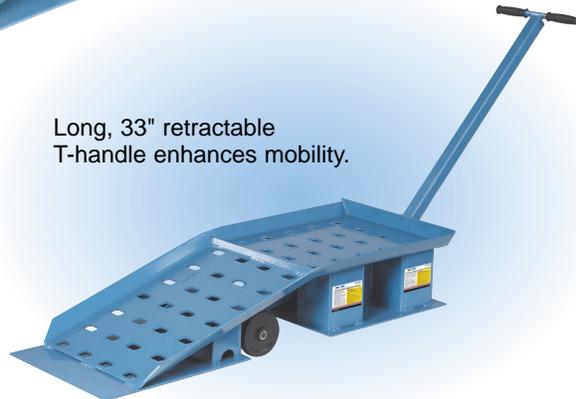**SPX****OTC**

1-800-533-6127
www.otctools.com

Service Solutions, a unit of SPX Corporation

655 Eisenhower Drive, Owatonna, MN 55060-0995
Phone: 507-455-7000, International Sales: 507-455-7223

05-12
Printed in USA