



655 Eisenhower Drive  
Owatonna, MN 55060 USA  
Phone: (507) 455-7000  
Tech. Serv.: (800) 533-6127  
Fax: (800) 955-8329  
Order Entry: (800) 533-6127  
Fax: (800) 283-8665  
International Sales: (507) 455-7223  
Fax: (507) 455-7063

Form No. 106084


Parts List &  
Operating Instructions  
for:

7894



## Adapter Set

Application: Dodge / Jeep 4WD Upper and Lower Ball Joints


No. 313967  
Remover Cup

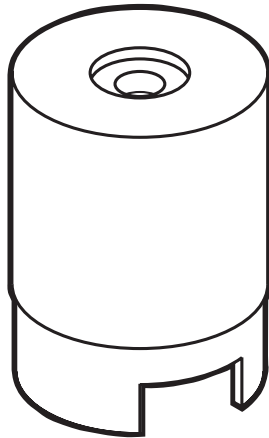

No. 313969  
Installer Cup

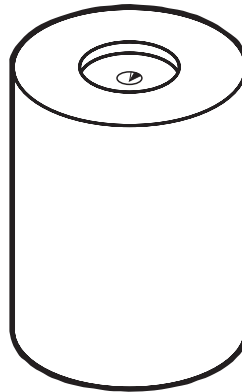

No. 313968  
Remover




No. 313970  
Installer

## Safety Precautions




**Caution:** To prevent personal injury:




- Wear protective eyewear that meets ANSI Z87.1 and OSHA standards.
- Before performing any repairs on a vehicle, block all wheels to prevent movement.
- Check the final alignment of tooling and components before using a C-frame press to exert pressure.

### Operating Instructions


1. Position the tools as shown to remove or install the upper or lower ball joint. **Note for Installation:** Clean the control arm, and coat the I.D. with a suitable lubricant.
2. Tighten the forcing screw until it meets the cup, and check the alignment of all tooling and components. Continue tightening the forcing screw until the ball joint is removed or installed.

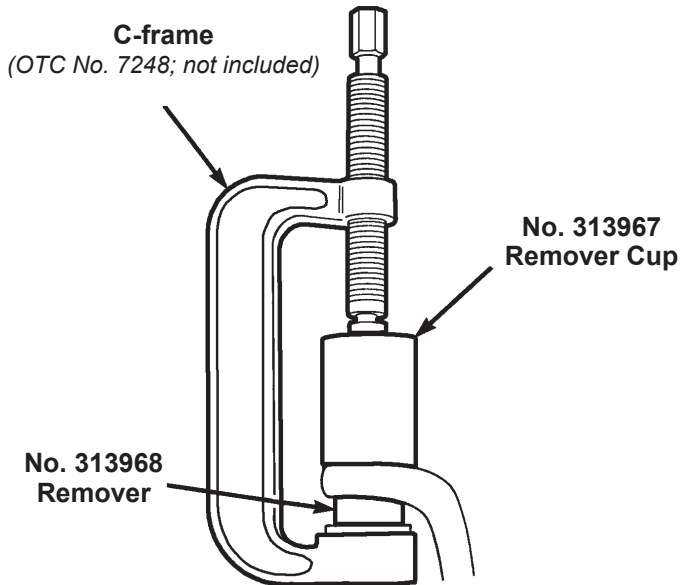


**Removing the Upper Ball Joint**

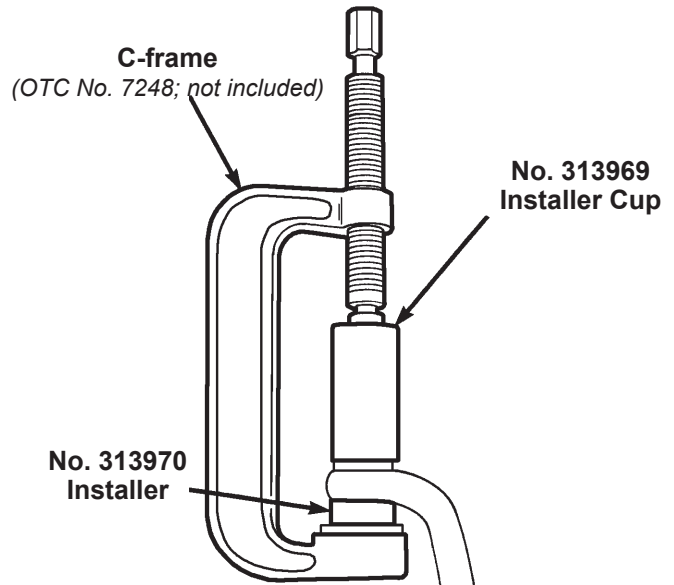

**Installing the Upper Ball Joint**

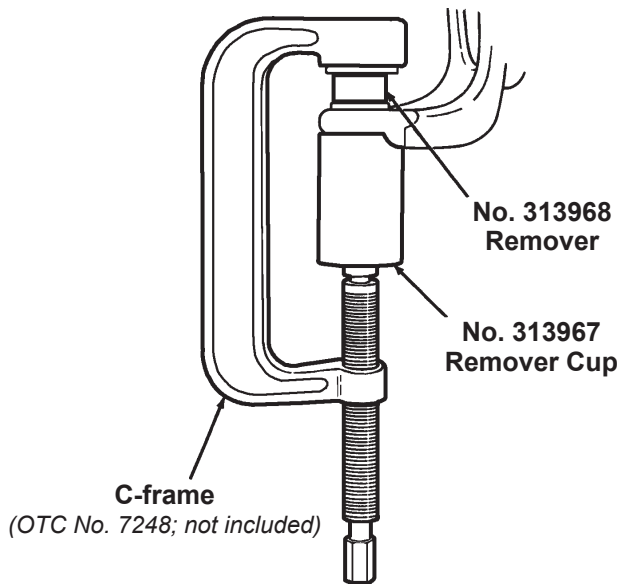

**Removing the Lower Ball Joint**

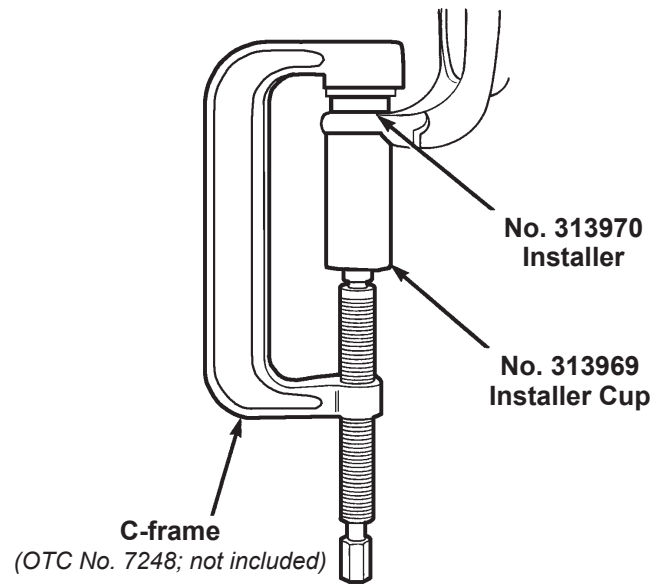

**Installing the Lower Ball Joint**